GLOBAL ☆

Global 32W
IP40

Plafoniera adatta per l'installazione a soffitto o a parete, ma anche da incasso, ad appoggio, per pannelli modulari con struttura portante a vista.

Corpo e telaio: lamiera di acciaio 6/10, verniciata con polveri poliestere in grado di garantire un'ottima resistenza agli agenti chimici.
Diffusore: : in metacrilato piano opale (UGR <18).
Ottica PAR: darklight/doppia parabolicità, in alluminio preanodizzato (UGR <16).
Moduli LED: ad altissima efficienza, alimentati a 350mA e 450mA, temperatura colore: 3000/4000K. CRI>80.
Durata utile: 100.000h L80 B10 @ta25, 60.000h L80 B20 @tamax.
Alimentazione: driver 220-240V 50/60Hz, ripple free, SP system, Active PFC.

Global 42W
IP40

Disponibile a richiesta:
- driver dimmerabile 1-10V o DALI;
- kit emergenza 1-3h SA interna;
- kit di sospensione.

Global PAR 32W
IP20

Surface mounting fitting, suitable for wall/ceiling installation and also on false ceiling recessed fitting, for modular panels with visible mounting system.

***Housing and main frame**: steel sheet 6/10 painted with polyester powders to guarantee an excellent resistance to chemical agents.*
***Diffuser:** opal white methacrylate (UGR <18).*
***PAR optic:** dark/light preanodized aluminium double parabolic (UGR <16).*
***LED modules:** high efficiency, 350mA and 450mA current, color temperature: 3000/4000K. CRI>80.*
***Expected lifetime:** 100.000h L80 B10 @ta25, 60.000h L80 B20 @tamax.*
***Power supply:** 220/240V 50/60Hz with electronic ballast, ripple free, SP system, Active PFC.*

Available on request:
- *dimmable 1-10V or DALI driver;*
- *internal 1-3h maintained emergency;*
- *suspension kit.*

Global PAR 42W
IP20

Kit di sospensione
Suspension kit



Installazione a soffitto/parete
Surface installation

COLORI DISPONIBILI
Bianco RAL 9003

Available colors
RAL 9003 White 1

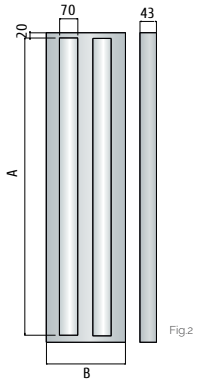

Fig.2



Fig.4



Fig.1



Fig.3

CODICE Code	CABLAGGIO Wiring	POTENZA Power(W)	FLUSSO NOMINALE Typical flux(lm)	FLUSSO NETTO Net output(lm)	CORRENTE Current(mA)	FIGURA Figure	A (mm)	B (mm)	UGR	PESO NETTO Net weight(Kg)
817641.218	LED	21W	3440	1890	450	1	595	295	<18	2,90
817641.236	LED	42W	6880	3785	450	2	1195	295	<18	5,60
817641.237	LED (HO)	64W	10880	5980	350	2	1195	295	<18	5,74
817641.418	LED	42W	6880	3785	450	3	595	595	<18	5,40
817641.419	LED (ECO)	32W	5440	2990	350	4	595	595	<18	4,71
818641.218	PAR LED	21W	3440	2650	450	1	595	295	<16	2,80
818641.236	PAR LED	42W	6880	5300	450	2	1195	295	<16	5,40
818641.237	PAR LED (HO)	64W	10880	8380	350	2	1195	295	<16	5,67
818641.418	PAR LED	42W	6880	5300	450	3	595	595	<16	5,18
818641.419	PAR LED (ECO)	32W	5440	4190	350	4	595	595	<16	4,55

code + DALI	Driver dimmerabile DALI | DALI dimmable driver	
code + DIMM	Driver dimmerabile DIMM | DIMM dimmable driver	
code + 01	Kit emergenza 1h | 1h Emergency kit	0,35
code + 03	Kit emergenza 3h | 3h Emergency kit (escluso per | excluded for 21W)	0,54
962000.000	Kit di sospensione | Suspension kit	0,30



Global 44W 300mA



Global PAR LED 32W 250mA

UGR <16
UGR <18
IP20
IP40
CE
ta -25 / +40
1-10V
DALI
YEARS 3 ANNI WARRANTY

APPARECCHI SPORGENTI E IN SOSPENSIONE
SUSPENDED & SURFACE MOUNTED LUMINAIRES